

Advantages

- Excellent insulation characteristics
- Reduces risk of flanking noise
- Excellent recovery properties
- Quick and easy to install
- Can be fully recycled

Applications

Wilhams Flanking Strip is applied to the perimeter of the WIL-MAT RSD-T&G flooring system to prevent flanking transmission in dwellings, commercial and industrial buildings e.g. on intermediate floors as an insulating layer under the laminate in storerooms, industrial units, hotels, hospitals, libraries, schools, universities and general offices.

Description

Wilhams Flanking Strip is a 50mm wide cross linked polymer with a 25mm self adhesive backing.


Physical Information

Thickness: 6mm
Roll size: 50mm x 15,000mm

Technical Information

Wilhams Flanking Strip conforms to the following specifications:


- Colour: Grey
- Density: 32kg/m³
- Elongation at break;
 - Length ways – 240%
 - Cross ways – 250%
- Water absorption: <3%
- Temperature range: -40 to +90°C

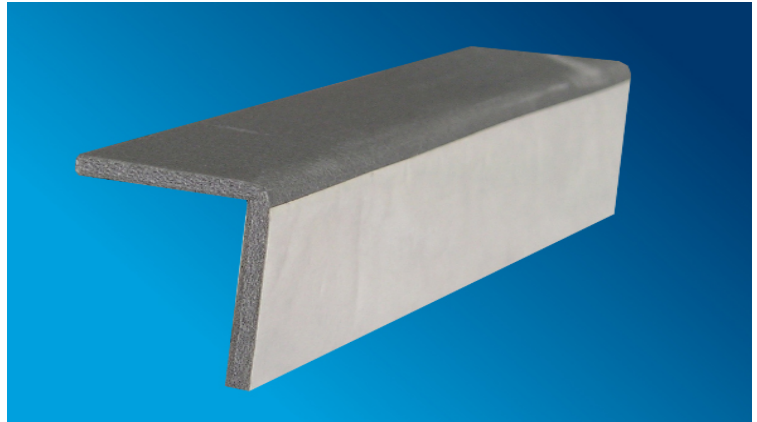

Installation Guidelines

The Wilhams Flanking Strip is installed prior to installing the Wilhams WIL-MAT RSD-T&G. Ensure the walls are dry, clean and free of dust. Minor variations of 1-2mm in the wall surface will not be detrimental to the performance of the Wilhams Flanking Strip. Remove the release paper of the Wilhams Flanking Strip and firmly apply the self adhesive to the base of the wall, (self adhesive to touch the existing concrete floor).

The WIL-MAT RSD-T&G is then installed, butting it up to the Wilhams Flanking Strip. The top 25mm which does not have self adhesive backing is then folded over. The skirting board is now installed sandwiching the Wilhams Flanking Strip between the Wilhams WIL-MAT RSD-T&G.

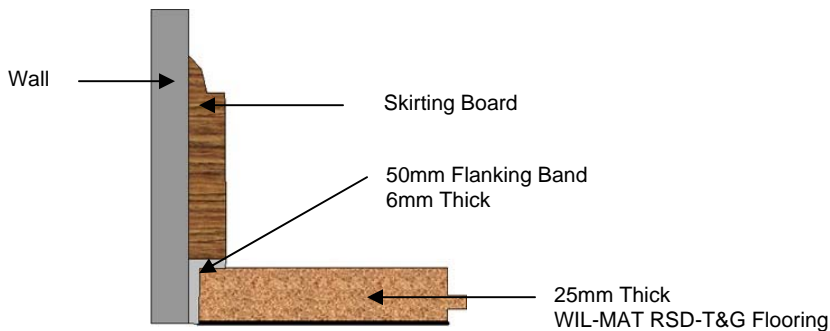

Wilhams Insulation Group

117 Bohemia Road, St Leonards-On-Sea, East Sussex TN37 6RL United Kingdom

Export Sales:- Tel: +44 (0) 1424 717171 Fax: +44 (0) 1424 20100 Email: sales@wilhams-insulation.co.uk

© Copyright 2005 Wilhams Insulation Limited.

IMPORTANT NOTICE: Any directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product to be used is suitable for that purpose intended.