

### Advantages

- Available in sheet or roll form.
- Flexible and easily cut.
- Easy to handle and install.
- Available in varying weights to suit application.
- Provides a cost effective sound barrier solution.
- Available with self-adhesive backing or Class 'O' foil facing.

### Applications

Wilhams WB-EPDM/BS barrier material can be used as either a single sound barrier layer such as a noise curtain, or as part of a composite combined with sound absorbing materials such as mineral wool or foam for soundproofing mats. Commonly utilised in roof, floor and wall sound reduction applications to reduce transmission of airborne and impact noise. Also used as a sound barrier / barrier outer wrap for pipeline applications.

### Description

Wilhams WB-EPDM/BS barrier is a high-density thermoplastic elastomeric material composed of a blend of EPDM polymers compounded with barium sulphate for high mass enhancement. Black / grey in colour, ecologically neutral and recyclable; the material is bitumen free.

### Technical Information

Wilhams WB-EPDM/BS barrier material conforms to the following specifications:

- Flammability (FMVSS 302) – Mod 4
- Tensile strength (BS2782: Pt3: 1976) – 5.75N.mm<sup>2</sup>
- Elongation at break (BS2782: Pt3: 1976) – 100%
- Hardness (Shore A) - 87°
- Service temperature - < 90°C (continuous)  
< 120°C (short periods)  
< -30°C
- Shelf Life – Indefinitely in cool dark conditions

### Physical Information

#### Dimensions


Standard sheet size: 2m x 1.2m

#### Weight

Wilhams WB-EPDM/BS barrier material is available in three standard weights:

Product Code	Thickness mm	Nominal Weight kg/m <sup>2</sup>
050	2.0	5.0
075	3.7	7.5
100	5.0	10.0

\*Other types and weights are available upon request

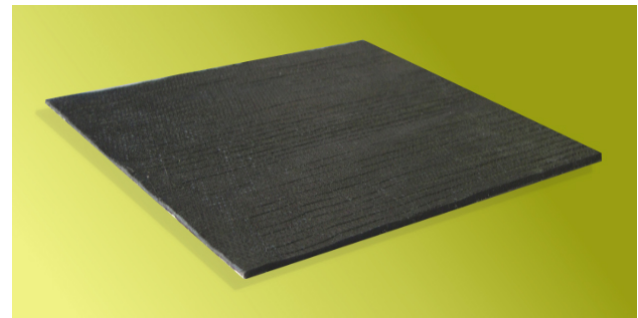

### Acoustic Performance

Wilhams WB-EPDM/BS barrier material is a high performance material that has been acoustically tested at a UKAS certified independent test laboratory.

Tested and Rated according to:

BS EN ISO 717-1:1997


BS EN ISO 140-3:1995

BS EN ISO 2750:Part3:1995

### Transmission Loss Data

Material \ Frequency	63	125	250	500	1k	2k	4k	8k
WB-EPDM/BS 050	19	14	18	22	27	32	38	44
WB-EPDM/BS 075	21	18	22	26	31	36	42	49
WB-EPDM/BS 100	22	20	24	28	33	39	44	50

### Transmission Loss

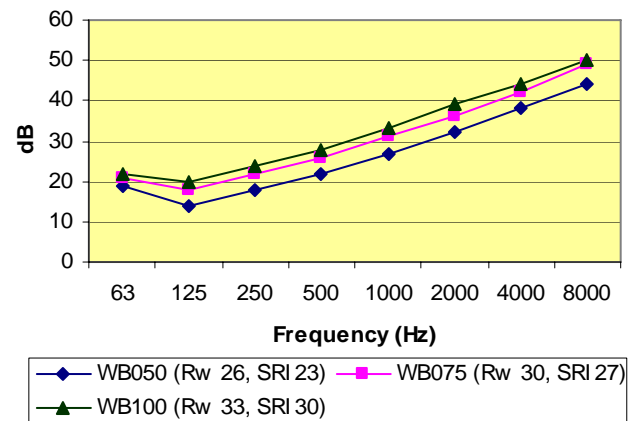

### Installation Guidelines

Wilhams WB-EPDM/BS barrier is installed either direct to the noise source or in conjunction with a spaced layer. The barrier can be applied by mechanical means i.e. pins, hangers or banding, or adhesively bonded using Wilhams A7153 adhesive or alternatively the barrier can be backed with Wilhams type A 3243a pressure sensitive adhesive.

For complete installation details please contact our technical department.

#### Wilhams Insulation Group

117 Bohemia Road, St Leonards-On-Sea, East Sussex TN37 6RL United Kingdom

Export Sales:- Tel: +44 (0) 1424 717171 Fax: +44 (0) 1424 20100 Email: [sales@wilhams-insulation.co.uk](mailto:sales@wilhams-insulation.co.uk)

© Copyright 2005 Wilhams Insulation Limited.

IMPORTANT NOTICE: Any directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product to be used is suitable for that purpose intended.