

Advantages

- Excellent insulation characteristics.
- No loss of thickness even under high static or dynamic loads.
- Maximum load bearing capacity 3 tonnes/m² (30kN/m²).
- Minimises construction height.
- Resistant to ageing and deformation.
- Permanently elastic, no degradation over time.
- Excellent recovery properties.
- Quick and easy to install.
- Can be fully recycled.

Applications

Wilhams WIL-MAT 60 is applied under the entire laminate area in dwellings, commercial and industrial buildings e.g. on intermediate floors as an insulating layer under the laminate in storerooms, industrial units, hotels, hospitals, libraries, schools, universities and general offices.

Description

Wilhams WIL-MAT 60 is a resin bonded rubber sheeting that is resistant to ageing and deformation.

Physical Information

Roll width: 1600mm
 Roll length: 10m (Non standard lengths are available upon request)
 Material thickness: 6mm

Technical Information

Wilhams WIL-MAT 60 conforms to the following specifications:

- Colour – Black / Anthracite
- Weight – 4.37 kg/m²
- Maximum load bearing – up to 3,000 kg/m²
- Thermal conductivity – 0.14 W/mK
- Deflection of less than 1mm under load 1.8kPa and dynamic stiffness of 14.4 MN/m³. Tested according to BS EN 29052-1:1992, compliant with Approved Document E.
- Temperature resistance – -20 to +80°C



Acoustic Performance

Test Product	Floor Type	Impact db (L'nT,w)	Impact db (Ln,w)	Airborne db (C; ctr)
Bare Construction	12.5mm plasterboard 2" x 2" battens / 150mm Concrete Floor	64	70	55 (-1 ; -5)
Wil-Mat 60	12.5mm plasterboard 2" x 2" battens 150mm Concrete Floor / Wil-mat 60 / 6mm Laminate Floor	49	55	52 (-1 ; -5)

Tested to Doc. E 2004 report no. 3924 & 3925

Installation Guidelines


Before installing the Wilhams WIL-MAT 60, ensure the concrete floor is dry, clean and free of dust. Minor variations of 1-2mm in the concrete surfacing will not be detrimental to the performance of the WIL-MAT 60.

Prior to cutting, unroll the WIL-MAT 60 and leave it to settle for two to three hours. This allows any tensions in the roll from the production process to dissipate.

Lay out the WIL-MAT 60 ensuring all edges are tightly butted.

To prevent flanking, the WIL MAT 60 must be turned up at the wall edges to a height of 5mm above the laminate flooring level.

Once the WIL-MAT 60 is laid, it can be immediately covered with the laminate flooring.

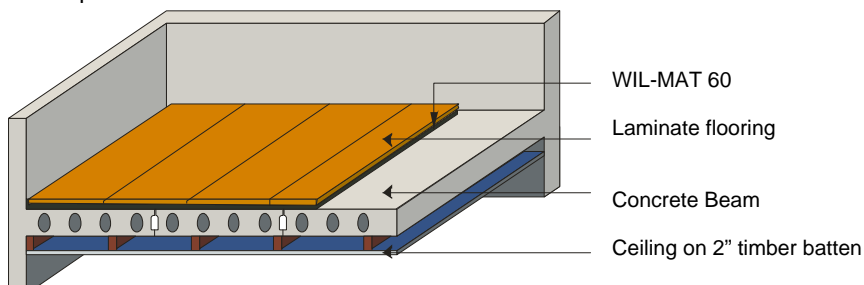

Wilhams Insulation Group

117 Bohemia Road, St Leonards-On-Sea, East Sussex TN37 6RL United Kingdom

Export Sales:- Tel: +44 (0) 1424 717171 Fax: +44 (0) 1424 20100 Email: sales@wilhams-insulation.co.uk

© Copyright 2005 Wilhams Insulation Limited.

IMPORTANT NOTICE: Any directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product to be used is suitable for that purpose intended.